

3012-N


Clip mount recessed pin plunger with wire leads

Recessed pin plunger

Sentrol offers the 3010 series pin plunger for tamper protection. The contact is hermetically sealed and reed actuated for positive operation on seldom-used enclosure openings.

Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

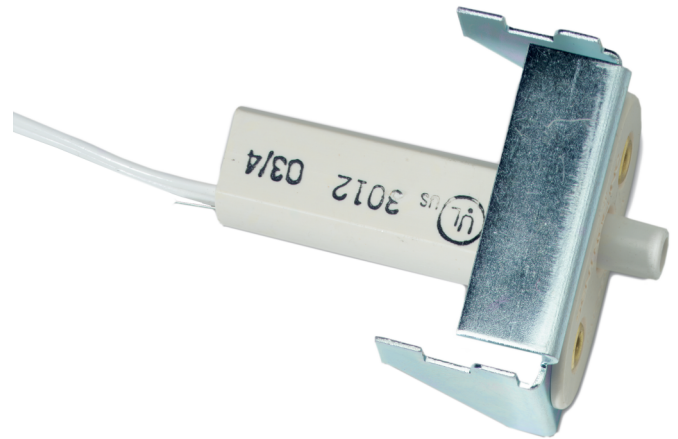

Details

- Adjustable plunger depth
- Including sheet metal mounting screws
- Easy installation
- Optional tamper loop provided

3012-N

Clip mount recessed pin plunger with wire leads

Technical specifications

General


Application type	Special Applications
Contact type	NC
Connectivity	30 cm wire leads

Wired/wireless

Wired-wireless	Wired
----------------	-------

Physical

Physical dimensions	40 x 35 x 7 mm
Colour	White
Dimensions magnet	N/A
Dimensions contact / sensor	40 x 35 x 7 mm

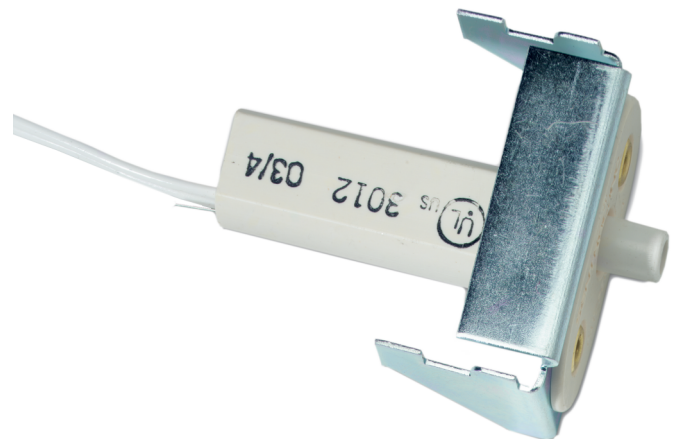

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

29 April 2019 - 13:33



**United
Technologies**

Climate | Controls | Security