



BPNONFE

BNONFE
BPNONFE

BNONFE

**Illuminated push button**
Bouton poussoir éclairé**Range:** Accessoires / **Gamme:** Accessoires d'installation**INSTALLATION MANUAL**
MANUEL D'INSTALLATION


BNONFE - BPNONFE

Illuminated push button


1] GENERAL INFORMATION

- **Illuminated (blue).**
- **Easy to mount (19MM hole).**
- **Heavy duty.**
- **Available in versions :**
 - Flush mount (Ref: BNONFE),
 - With a stainless steel plate (Ref: BPNONFE).
- **Input voltage:**
 - Contact = 12 V AC/DC - 5 A AC/DC.
 - LED = 12 V DC.
- Material: cast aluminium body and stainless steel.
- Push button with Silver plated contact switch.
- Wires with lug supplied.
- NO and NC contact outputs with 2 separate contacts.

BNONFE




BPNONFE

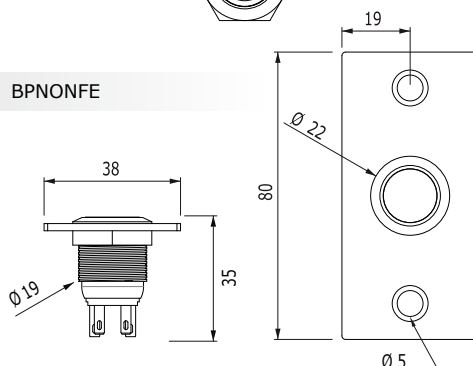

3] WIRING DIAGRAM

- Normally Open (NO) = 3 + 4,
- Normally closed (NC) = 1 + 2.

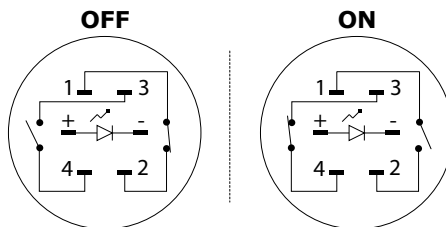

Switch bottom view

CABLE COLORS	
1	Black
2	Black
3	Red
4	Red
+	Blue
-	Grey

RoHS

WEEE

CE Certification

Environmental tests:
Salt spray

IP67

-40°C to +70°C

H.R.V.

HIGH RESISTANCE
TO VANDALISM

Recommended
power supplies



ARD12



BS60

2] MOUNTING



Seal supplied.

Ø19 mm.
hole diameter

Ø19 mm.


BNONFE - BPNONFE

Bouton poussoir éclairé


1] PRESENTATION

- **Eclairé (bleu).**
- **Montage facile sur support existant (simple perçage de 19 mm).**
- **Grande longévité.**
- **Disponible en versions :**
 - Encastrée (Réf : BNONFE)
 - Avec plaque inox (Réf : BPNONFE).
- **Tension d'alimentation :**
 - Contact = 12 V AC/DC - 5 A AC/DC.
 - LED = 12 V DC.
- Matière : inox.
- Bouton poussoir équipé d'un contacteur avec contacts en argent fin.
- Câbles avec cosses fournis.
- Contact NO et NC avec commun séparé.

BNONFE




BPNONFE

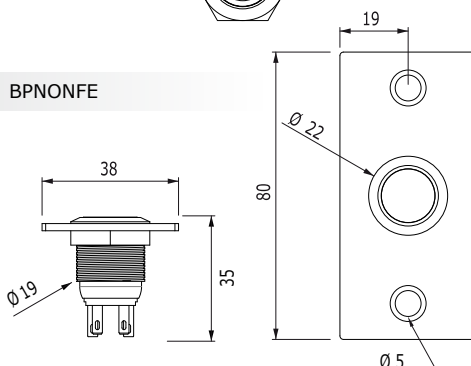


3] SCHÉMA DE CÂBLAGE

- Normalement Ouvert (NO) = 3 + 4,
- Normalement Fermé (NC) = 1 + 2.

OFF



ON



Vue de dessous du switch

2] MONTAGE



Alimentations préconisées



ARD12



BS60

COULEUR DES CABLES	
1	Noir
2	Noir
3	Rouge
4	Rouge
+	Bleu
-	Gris

Creator of electronic access solutions



CDVI Group

FRANCE (Headquarter/Siège social)

Phone: +33 (0)1 48 91 01 02

Fax: +33 (0)1 48 91 21 21

CDVI

FRANCE + EXPORT

Phone: +33 (0)1 48 91 01 02

Fax: +33 (0)1 48 91 21 21

CDVI AMERICAS

[CANADA - USA]

Phone: +1 (450) 682 7945

Fax: +1 (450) 682 9590

CDVI BENELUX

[BELGIUM - NETHERLAND - LUXEMBOURG]

Phone: +32 (0) 56 73 93 00

Fax: +32 (0) 56 73 93 05

CDVI

SUISSE

Phone: +41 (0)21 882 18 41

Fax: +41 (0)21 882 18 42

CDVI

CHINA

Phone: +86 (0)10 62414516

Fax: +86 (0)10 62414519

CDVI IBÉRICA

[SPAIN - PORTUGAL]

Phone: +34 (0)935 390 966

Fax: +34 (0)935 390 970

CDVI

ITALIA

Phone: +39 0321 90573

Fax: +39 0321 908018

CDVI

MAROC

Phone: +212 (0)5 22 48 09 40

Fax: +212 (0)5 22 48 34 69

CDVI SWEDEN

[SWEDEN - DENMARK - NORWAY - FINLAND]

Phone: +46 (0)31 760 19 30

Fax: +46 (0)31 748 09 30

CDVI UK

[UNITED KINGDOM - IRELAND]

Phone: +44 (0)1628 531300

Fax: +44 (0)1628 531003

DIGIT

FRANCE

Phone: +33 (0)1 41 71 06 85

Fax: +33 (0)1 41 71 06 86

All the information contained within this document (photos, drawing, features, specifications and dimensions) could be perceptibly different and can be changed without prior notice.
Toutes les informations mentionnées à titre indicatif sur le présent document (photos, dessins, caractéristiques techniques et dimensions) peuvent varier et sont susceptibles de modifications sans notification préalable.