


AUDIO ALARM VERIFICATION

AUDIO VERIFICATION MODULE

PC5900


- Talk/Listen-in audio verification module
- Up to 4 audio stations, 4 microphones (PC5921) and 2 speakers (PC5904) can be connected
- Remotely controlled via touchtone phone when operated during 2-way session
- Compatible with PC1616, PC1832 and PC1864 control panels
- All programming can be performed at the system keypad or remotely using DLS2002SA software

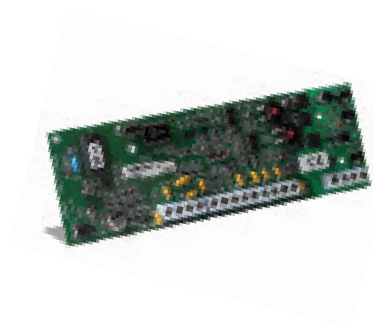

UNIVERSAL 2-WAY VOX AUDIO VERIFICATION MODULE

PC5950

- 2-way audio VOX and/or push-to-talk verification
- Supports 4 microphones and 2 speakers
- Listen-in mode
- User call-in feature
- Compatible with most industry control panels
- KEYBUS direct connect allows all programming to be performed at the system keypad or remotely using DLS2002SA software

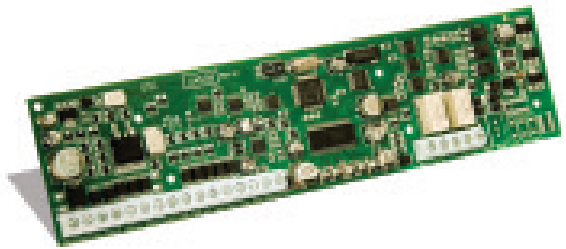

CONTOURED AUDIO STATION

PC5962

- Equipped with speaker/microphone
- Fits seamlessly to side of PK/RFK series of keypads
- New modern look
- Specifically designed for 2-way voice verification
- 2-wire connection to module
- Compatible with PC5900 and PC5950 modules



STAND-ALONE AUDIO STATION

PC5961

- Equipped with speaker/microphone
- New modern look
- Specifically designed for 2-way voice verification
- 2-wire connection to module
- Compatible with PC5900 and PC5950 modules



LARGE SPEAKER STATION

PC5964

- Equipped with speaker/microphone
- New modern look
- Specifically designed for 2-way voice verification
- Bell follower functionality (replaces internal sounder on premises)
- 2-wire connection to module
- Compatible with PC5900 and PC5950 modules

