

# **4/8-Port PoE Switch User's Manual**

**V1.0.0**

# Important Safeguards and Warnings

## Attention:

Please read the following safeguards and warnings carefully before using the product in order to avoid damages and losses.

Note:

- Do not expose the device to lampblack, steam or dust. Otherwise it may cause fire or electric shock.
- Do not install the device at position exposed to sunlight or in high temperature. Temperature rise in device may cause fire.
- Do not expose the device to humid environment. Otherwise it may cause fire.
- The device must be installed on solid and flat surface in order to guarantee safety under load and earthquake. Otherwise, it may cause device to fall off or turnover.
- Do not place the device on carpet or quilt.
- Do not block air vent of the device or ventilation around the device. Otherwise, temperature in device will rise and may cause fire.
- Do not place any object on the device.
- Do not disassemble the device without professional instruction.

## Warning:

- Please use battery properly to avoid fire, explosion and other dangers.
- Please replace used battery with battery of the same type.
- Do not use power line other than the one specified. Please use it properly. Otherwise, it may cause fire or electric shock.

## Special Announcement:

- This manual is for reference only.
- All the designs and software here are subject to change without prior written notice.
- All trademarks and registered trademarks are the properties of their respective owners.
- If there is any uncertainty or controversy, please refer to the final explanation of us.
- Please visit our website for more information.

## Applicable Models:

The manual can be applied to the following models:

PFS3106-4P-60, PFS3110-8P-96

# Table of Contents

<b>Important Safeguards and Warnings.....</b>	<b>2</b>
<b>Table of Contents.....</b>	<b>3</b>
<b>1Product Overview.....</b>	<b>4</b>
1.1Features.....	4
1.2Typical Application .....	4
<b>2Device Structure.....</b>	<b>6</b>
2.14-Port PoE Switch.....	6
2.28-Port PoE Switch.....	10
<b>3Installation Guide.....</b>	<b>13</b>
<b>Appendix 1 Technical Specification.....</b>	<b>14</b>

# 1 Product Overview

## 1.1 Features

### Common Features:

- Two-layer industrial POE switch.
- Conform IEEE802.3, IEEE802.3u, IEEE802.3ab/z and IEEE802.3X standards.
- MAC auto study and aging, MAC address list capacity is 8K.
- All ports self-adapt MDI/MDIX mode.
- All the 10/100M self-adaptive RJ45 ports support IEEE802.3af, IEEE802.3at standard power supply.
- Industrial wide temperature design.
- Adopt metal structure.
- Support DC 53V power supply.

### Individual Features:

- 4-port PoE switch 1 100/1000M self-adaptive SFP fiber port, 1 10/100/1000M self-adaptive RJ45 port and 4 10/100M self-adaptive RJ 45 ports.
- 4-port PoE switch with 60W power adapter.
- 8-port PoE switch supports 1 1000M SFP fiber port, 1 10/100/1000M self-adaptive RJ45 port and 8 10/100M self-adaptive RJ 45 ports.
- 8-port PoE switch with 96W power adapter.

## 1.2 Typical Application

The typical application of the device is shown in Figure 1- 1



## 2 Device Structure

### 2.1 4-Port PoE Switch

#### Front Panel

The front panel is shown in Figure 2-1.

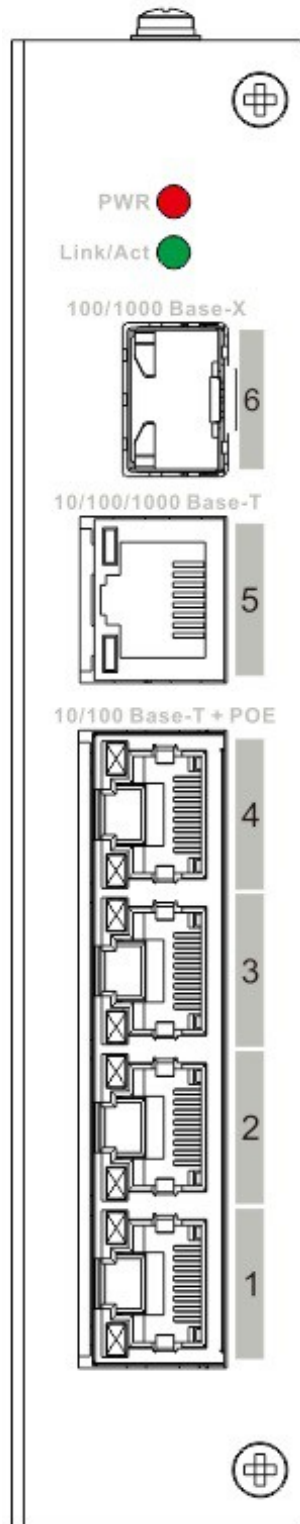


Figure 2-1

SN	Name	Note
1	10/100 Base-T	4 10/100M self-adaptive PoE power supply ports.
2	10/100/1000 Base-T	10/100/1000M self-adaptive RJ45 port.
3	100/1000 Base-X	100/1000M self-adaptive SFP fiber port.

SN	Name	Note
4	Link/Act	Fiber port status indicator
5	PWR	Power indicator

Sheet 2-1

## Upper Cover

The device power port is shown in Figure 2-2, support DC53V power supply.



Figure 2-2

## **PoE Power Supply**

4 10/100M RJ45 ports support IEEE802.3af, IEEE802.3at standard power supply.

Support 4 10/100M RJ45 Ports IEEE802.3af standard power supply simultaneously.

Support 2 10/100M RJ45 ports IEEE802.3at standard power supply simultaneously.

## 2.2 8-Port PoE Switch

### Front Panel

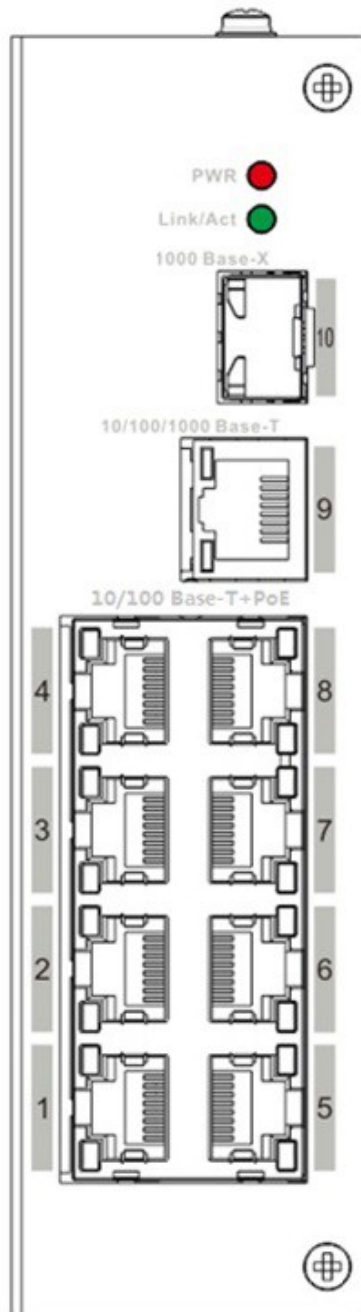


Figure 2-3

SN	Name	Note
1	10/100 Base-T	8 10/100M self-adaptive RJ45 ports, which are used for PoE power supply.
2	10/100/1000 Base-T	10/100/1000M self-adaptive RJ45 port.
3	1000 Base-X	1000M self-adaptive SFP fiber port.

SN	Name	Note
4	Link/Act	Fiber port status indicator.
5	PWR	Power indicator.

Sheet 2-2

## Upper Cover

The device power port is shown in Figure 2-4, support DC53V power supply.



Figure 2-4

## PoE Power Supply

8 10/100M RJ45 ports support IEEE802.3af, IEEE802.3at standard power supply.

## 1 产品简介

错误！未知的文档属性名称错误！未知的文档属性名称

Support several RJ45 Ports IEEE802.3af and IEEE802.3at standard power supply simultaneously,  
total power consumption of PoE power supply is less than 93W.

# 3 Installation Guide

PoE switch supports DIN rail mounting. Lay the switch hook on the rail, press the PoE switch to make the buckle get into the slide, see Figure 3-1.

Note:  
4-port PoE switch supports the slide width of 28mm.  
8-port PoE switch supports the slide width of 38mm.

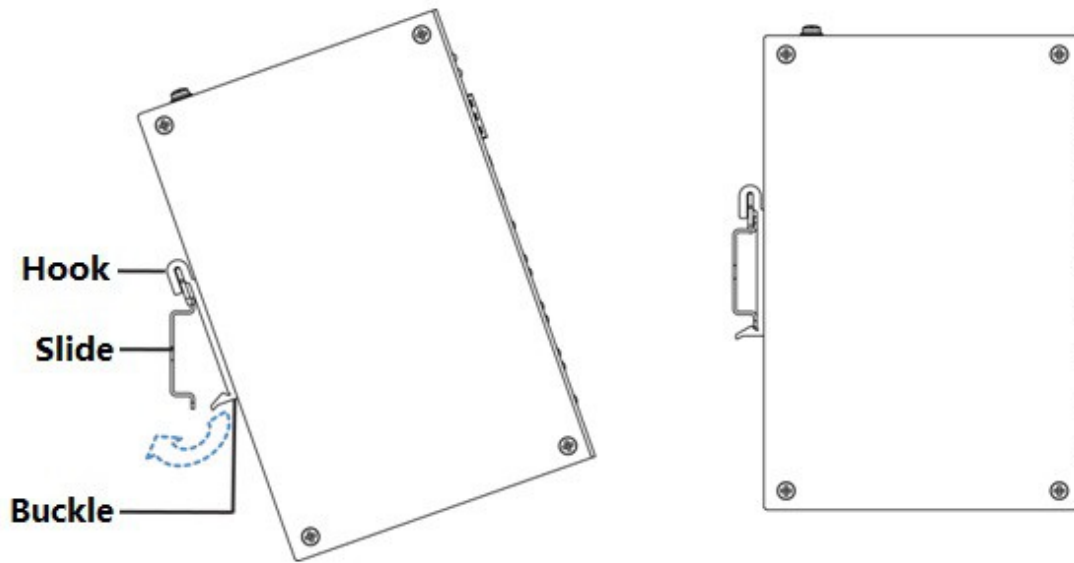


Figure 3-1

# Appendix 1 Technical Specification

Technical Parameters	PFS3106-4P-60	PFS3110-8P-96
Physical Port		
Business Port	1*100/1000 Base-X、 1*10/100/1000 Base-T、 4*10/100 Base-T (POE power supply)	1*1000 Base-X、 1*10/100/1000 Base-T、 8*10/100 Base-T (POE power supply)
Technical Index		
Exchange Capacity	4.80Gbps	5.60Gbps
Packet Forwarding Rate	3.57Mpps	4.17Mpps
Exchange Mode	Store & forward	Store & forward
MAC Study	MAC auto study, address list capacity 8K	MAC auto study, address list capacity 8K
Common Parameters		
Lightning Protection Level	Lightning protection level 3	Lightning protection level 3
Indicator	Power indicator, fiber port status indicator	Power indicator, fiber port status indicator
Power	Default DC53V power adapter	Default DC53V power adapter
Power Consumption	≤60W	≤96W
Application Humidity	10%~90%	10%~90%
High &Low Temperature	-30℃~65℃	-30℃~65℃
Weight	480g	540g
Dimension	150mm×100mm×30mm	150mm×100mm×42mm

## Note

- This user's manual is for reference only.
- Slight difference may be found in user interface.
- All the designs and software here are subject to change without prior written notice.
- [All trademarks and registered trademarks are the properties of their respective owners.](#)

- **If there is any uncertainty or controversy, please refer to the final explanation of us.**
- **Please visit our website for more information.**